


Tragen Sie bei "Hostname oder IP-Adresse:" Die Nummer "10.0.0.138" ein und bestätigen mit "Weiter".



Das DFÜ-Netzwerk "Dialog ADSL" wurde erstellt. Klicken Sie dieses Icon mit der rechten Maustaste an und wählen Sie "Eigenschaften".
Nun muß die Seite "Servertypen" angeklickt werden. Entfernen Sie alle Einträge bis auf "TCP/IP".
Anschließend sollten unter "TCP/IP-Einstellungen" die Namensserver (DNS-Server) eingestellt und die Option "IP-Headerkomprimierung" deaktiviert werden. Die Namensserver lauten: "195.58.160.2" und "195.58.161.3".

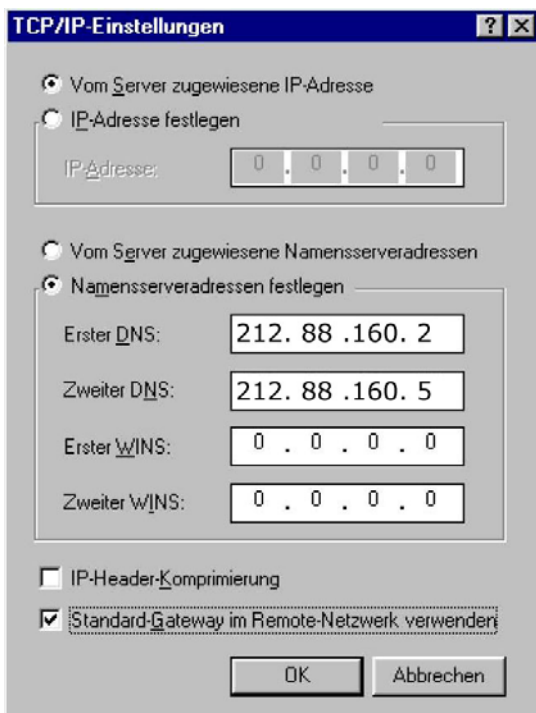

Eingabe von Benutzername und Kennwort und der erste Verbindungsaufbau.

Dazu öffnen Sie das Symbol "Dialog ADSL" durch einen Doppelklick und geben Ihre Daten laut Datenblatt an.



The image shows a Windows-style dialog box titled "Verbinden mit" (Connect with). The main content area is titled "Dialog ADSL" and contains the following fields and options:

- Benutzername:** A text input field containing "Benutzername@ycn.com".
- Kennwort:** A password input field containing "xxxxxxxxxx".
- Kennwort speichern** (Save password)
- VPN-Server:** A text input field containing "10.0.0.138".

At the bottom of the dialog, there are two buttons: "Verbinden" (Connect) and "Abbrechen" (Cancel).